


## Description

- 1 inch pitch
- Open design
- 46% open area; 63% open contact area; largest opening 0.29x0.37 inches (7.3x9.5 mm)
- Elimination of leading edge lift
- Locked on friction material
- Flexible build patterns
- Optional configurations — contact your local partner
- 72 durometer Shore A
- Connecting rod diameter = 0.156 inch (4.0 mm)

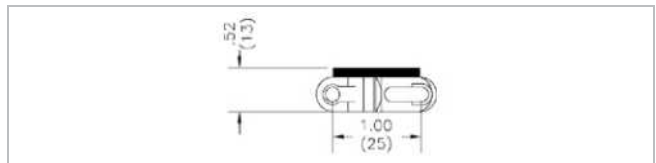

## Belt data

Belt material		PP	
		PP	PA
Rod material		PP	PA
Nominal tensile strength $F'_N$ straight run	N/m	10215	10215
	lb/ft	700	700
Nominal tensile strength $F_N$ in curve <sup>(1)</sup>	N	800	800
	lbf	180	180
Temperature range	°C	5 - 71	5 - 71
	°F	40 - 160	40 - 160
Belt weight $m_B$	kg/m <sup>2</sup>	3.4	3.4
	lb/sqft	0.70	0.70
Standard belt color		gray/white	gray/white


Diameter of idling rollers (minimum)	
mm	inch
41	1.60

**Standard range of belt widths** in increments of 3" (76.2mm) starting from 6" (152.4mm). Material selection may affect belt width — please contact your local partner for actual dimensions.

Colors: gray base with black top; white base with white top

Additional belt colors and materials available, abrasive resistant Nylon (Polyamide) rods available.

**Belt accessories**

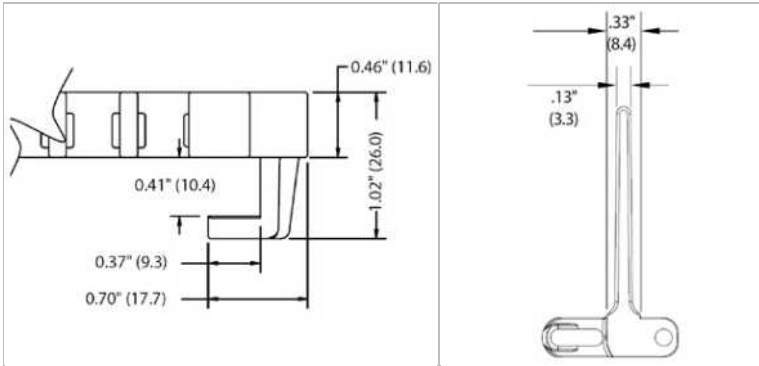

**Hold-down tabs**

Hold-down tabs available in propylene and acetal only

**Standard flights**

Standard flights are available in standard 2\" data-bbox="349 289 550 317"/>

**Disclaimer**

**Product Application Disclaimer (valid for ALL Habasit products and mentioned on all PDS)**

This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice. EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.