

HabasitLINK[®] sprockets – 2" pitch belting


SP620, IS620, SE620



Molded sprocket



Machined sprocket

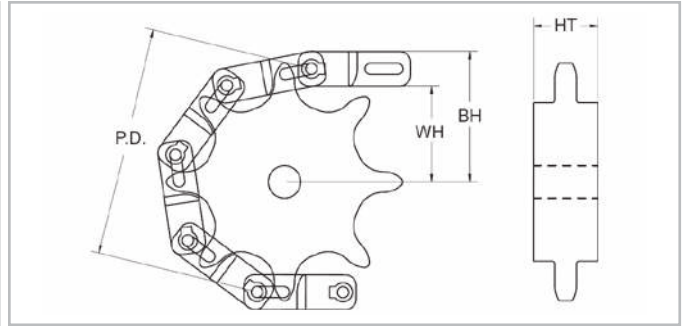

Sprocket part number	Number of teeth	(PD) Nominal pitch diameter		(WH) Shaft center to top of wearstrip		(BH) Shaft center to top of belt		(HT) Hub thickness	
		inch	mm	inch	mm	inch	mm	inch	mm
SP72006	6	4.00	102	1.34	34	2.13	54	1.25	32
72008M	8	5.23	133	2.01	51	2.82	72	1.5	38
72010M	10	6.47	164	2.64	67	3.44	87	1.5	38
SP72011	11	7.1	180	3.00	76	3.81	97	1.25	32
72012M	12	7.73	196	3.35	85	4.13	105	1.5	38
SP72015	15	9.62	244	4.29	109	5.10	130	1.25	32
SP72018	18	11.52	293	5.28	134	6.07	154	1.25	32

M = molded sprocket

Split sprockets and other tooth sizes are available. Standard machined sprocket material is UHMW, Nylon and Urethane are available.

Sprocket part number	Available bore size															
	25 mm	1"	1" sq.	30 mm	1-1/4"	1-7/16"	1-1/2"	1-1/2" sq.	40 mm	40 mm sq.	1-15/16"	50 mm	2" sq.	60 mm	60 mm sq.	2-1/2" sq.
SP72006	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-
72008M	-	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-
72010M	-	✓	-	✓	✓	✓	✓	✓	-	✓	-	-	-	-	-	✓
SP72011	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
72012M	-	✓	-	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	✓
SP72015	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP72018	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

M = molded sprocket

All bore sizes are round bore unless designated square (sq.).