


**WZ1-1/2-L-KD**

Solid shaft

inch sizes

## Información técnica

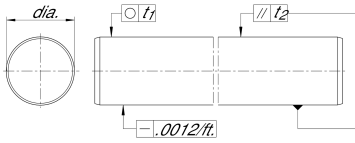

## Variante de su producto actual

|                    |         |   |
|--------------------|---------|---|
| Size code          | 1-1/2"  |   |
| Tolerance diameter | L       | DLW Tol   |
| Material           | CF53    | Heat treatable steel (material no.:1.1213)                                      |
| Recubrimiento      | KD      | Thin dense chromium coating, protect A, anti-wear and anti-corrosion protection |
| Longitud           | 4000 mm | EWL max.  |

## Medidas principales y datos de rendimiento

|                     |            |                               |
|---------------------|------------|-------------------------------|
| d <sub>LW</sub>     | 38,1 mm    | Diameter Shaft                |
| d <sub>LW Tol</sub> | L          | Diameter tolerance shaft      |
| L <sub>Tol</sub>    | -15 μm     | Diameter Shaft tolerance high |
| L <sub>Tol</sub>    | -28 μm     | Diameter tolerance low        |
| ≈m                  | 8,949 kg/m | Peso                          |

## Medidas de montaje

|                    |        |                        |
|--------------------|--------|------------------------|
| t <sub>1</sub>     | 7 μm   | Roundness              |
| t <sub>2</sub>     | 11 μm  | Parallelism            |
| SHD <sub>min</sub> | 1,5 mm | Surface Hardness Depth |