

**KTSS20-PP-AS** [↗](#)

Unidad de rodamiento lineal de bolas

Linear ball bearing and housing unit;
adjustable clearance, with self-aligning linear
ball bearing, contact seals on both sides

Información técnica

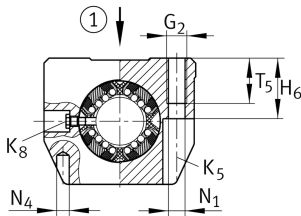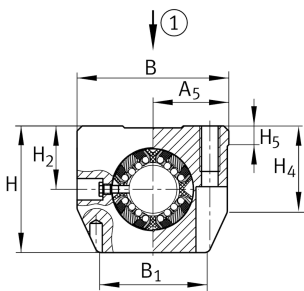

Variante de su producto actual




Size code	20
Seal	PP
Función de relubricación	AS

Medidas principales y datos de rendimiento

F _W	20 mm	Diameter of ball complement
H	50 mm	Height
L	96 mm	Longitud
B	60 mm	Anchura
C _{max}	3.500 N	Load capacity dyn.
C _{0 max}	4.600 N	Load capacity stat.
≈m	0,56 kg	Peso



Medidas de montaje

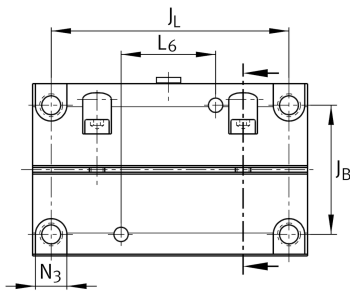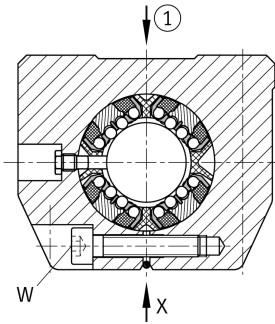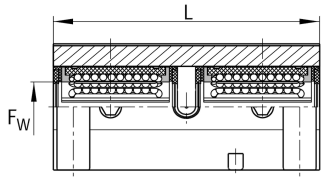

J_B	45 mm	
Tol J_B	+ 0,15 mm	Upper tolerance
Tol J_B	- 0,15 mm	Lower tolerance
B_1	44 mm	
A_5	30 mm	
Tol A_5	+ 0,01 mm	Upper tolerance
Tol A_5	- 0,01 mm	Lower tolerance
J_L	76 mm	Distance
Tol J_L	+ 0,15 mm	Upper tolerance
Tol J_L	- 0,15 mm	Lower tolerance
L_6	33 mm	Distance
H_2	25 mm	Center height
Tol H_2	+ 0,008 mm	Upper tolerance
Tol H_2	- 0,016 mm	Lower tolerance
H_4	34,1 mm	
H_5	7,4 mm	
T_5	18 mm	
H_6	24 mm	
G_2	M8	
N_1	6,6 mm	
N_4	5 mm	
N_3	11 mm	
K_5	M6	
K_8	NIP4MZ	Lubrication nipple
W	4 mm	Width across flats
	8	Ball rows