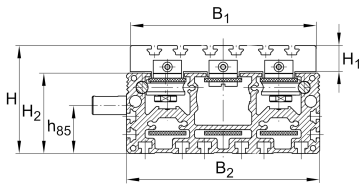
**MLFI140-500-3ZR-N** [↗](#)

## Módulo lineal

Actuators with internal track roller guidance system and toothed belt drive. With triple toothed belt and fixing slots in carriage


## Información técnica

**Variante de su producto actual**

Size code	140	
Length of carriage	500	500 mm
Version	/	Standard
Ejecución	/	Basis
Drive type	(3)ZR	Toothed belt drive
Additional carriage	/	No additional carriage
Attachment to the carriage	N	T-Slots
Support rail design	/	One-piece




**Medidas principales y datos de rendimiento**

B <sub>2</sub>	180 mm	Total Width
H	105 mm	Altura
L	500 mm	Longitud

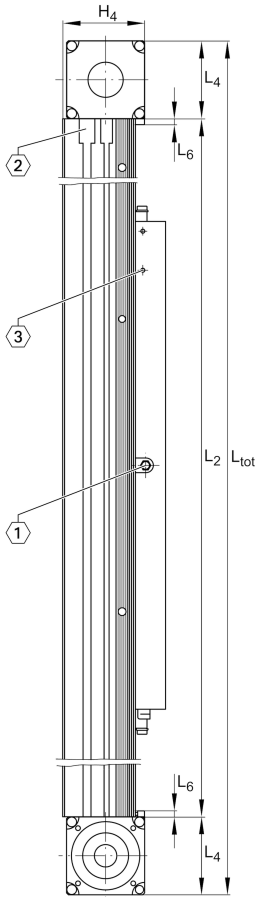


**Medidas de montaje**

D 86	70 mm	
Tol D 86	G7	Tolerance
D 87	80 mm	Ø Bolt circle
d 85	25 mm	
Tol d 85	h7	Tolerance
L 88	45 mm	
d 86	61 mm	Ø Inner Fit
G 87	M6	Thread
h 85	44 mm	
J B43	80 mm	
J B44	130 mm	
J B8	70 mm	
j B9	140 mm	
l 41	354 mm	
N B85	8 mm	Width of Keyway
Tol N B85	P9	Tolerance
N L85	25 mm	Length of Keyway
N T85	4 mm	Depth of Keyway, Tolerance P9
T 86	2,3 mm	Depth Fit
Tol T 86 up	0,3 mm	Upper Tolerance
Tol T 86 low	0 mm	Lower Tolerance
t 87 max	12 mm	

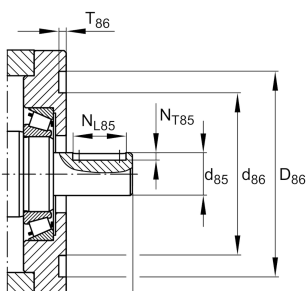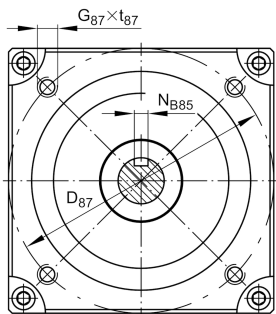
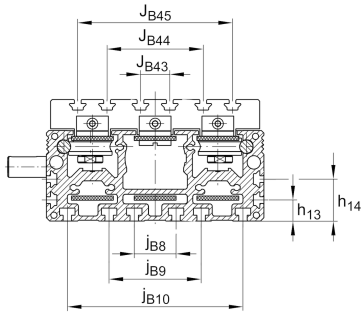


La hoja de datos solo contiene una descripción general de los datos técnicos del producto seleccionado. Consulte la documentación adicional de este producto. Para más información, utilice el siguiente enlace en nuestra página web: [Formulario de contacto](#)

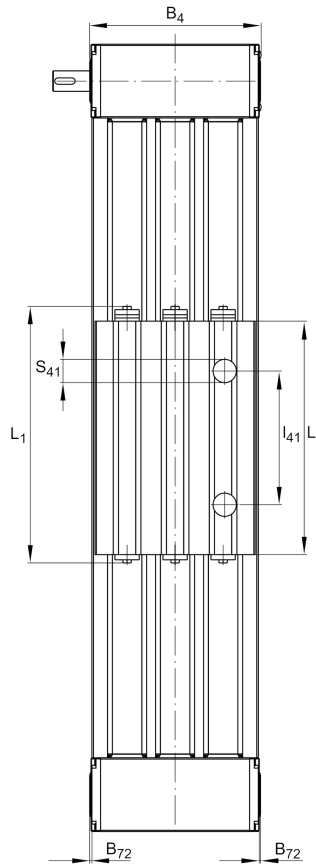

**Medidas**

$B_1$	176 mm	Width of Carriage
$B_4$	195 mm	Width of Return Unit
$B_{72}$	2 mm	
$H_1$	29,3 mm	Height of Carriage
$H_2$	74,5 mm	Altura
$H_4$	84 mm	Height of Return Unit
$h_{13}$	25 mm	
$h_{14}$	45 mm	
$L_1$	542 mm	Longitud
$L_{2 \text{ max}}$	8.000 mm	Maximum length of Support Rail
$L_4$	80 mm	
$L_6$	6 mm	Length of Wiper Brushes
$S_{41}$	30 mm	
$S$	85 mm	Medida

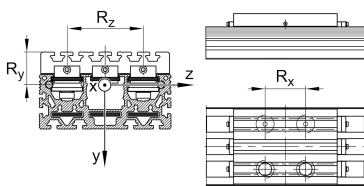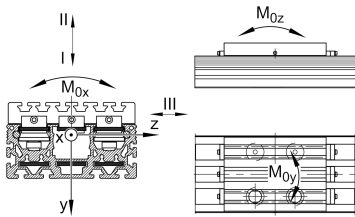



### Datos técnicos

$m_{LAW}$	8,87 kg	Mass of Carriage
$v_{max}$	8 m/s	Maximum Speed
$a_{max}$	40 m/s <sup>2</sup>	Maximum Acceleration
$R_x$	354 mm	
$R_y$	44,5 mm	
$R_z$	104,5 mm	
I C	17.500 N	Load direction I: compressive load
I C <sub>0</sub>	8.000 N	Load direction I: compressive load
II C	17.500 N	Load direction II: tensile load
II C <sub>0</sub>	8.000 N	Load direction II: tensile load
III C	27.600 N	Load direction III: lateral load
III C <sub>0</sub>	14.800 N	Load direction III: lateral load
M <sub>0x per</sub>	610 Nm	Max. permissible static moment per Carriage
M <sub>0y per</sub>	2.630 Nm	Max. permissible static moment per Carriage
M <sub>0z per</sub>	1.450 Nm	Max. permissible static moment per Carriage
I <sub>y</sub>	1.636 cm <sup>4</sup>	Geometrical moments of inertia of Support Rail
I <sub>z</sub>	200 cm <sup>4</sup>	Geometrical moments of inertia of Support Rail

### Información adicional

	115 Nm	Max. permissible drive torque
	4 x LFR5301-10-2Z	Track Rollers
	0,1 mm	Repeat Accuracy ±
	160 mm	Feed (mm/rotation)
	40AT10	Toothed Belt
	0,75 kg/m	Mass of Toothed Belt
	4.500 N	Permissible Toothed Belt operating force
	8,2 kg*cm <sup>2</sup>	Mass moment of inertia of Gears and Gearboxes



### Rango de temperatura

---

T <sub>min</sub>	0 °C	Minimum operating Temperatur
------------------	------	------------------------------

T <sub>max</sub>	80 °C	Maximum operating Temperatur
------------------	-------	------------------------------