


**LTS20-130-TR16x4-M-0** [↗](#)

Mesa lineal

Información técnica

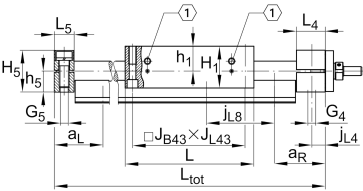
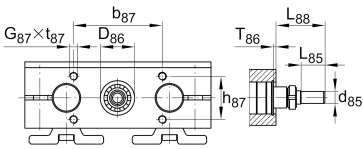
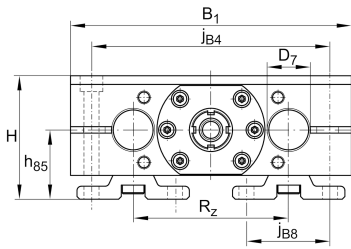


Variante de su producto actual

Size code	20	
Drive type	TGT	Trapezoidal screw drive
Length of carriage	130	130 mm
Spindle diameter	16	16mm
Spindle pitch	04	4 mm
Spindle nut design	M	Cylinder nut
Bellow	0	No

Medidas principales y datos de rendimiento

H	57 mm	Total Height
B 1	130 mm	Total Width
L	130 mm	Length of carriage

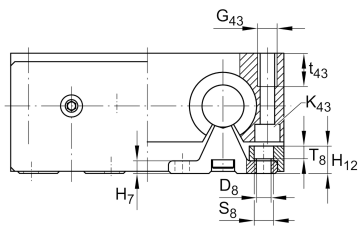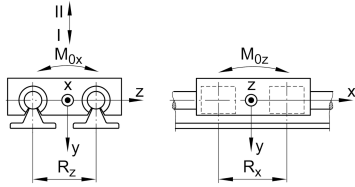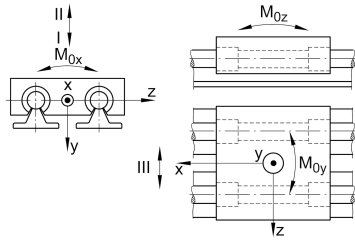

Medidas de montaje

D 7	20 mm	Tolerance h7
D 8	6,6 mm	
H 1	42 mm	Height of carriage
H 12	13 mm	
J B43	115 mm	
j B8	37 mm	
j L8	100 mm	
K 43	M6	
L tot	2.900 mm	Maximum length
R x	74,6 mm	
S	4 mm	Safety distance
S	11 mm	
T 8	6,1 mm	
T 86	2,8 mm	Depth Fit
t 43	18 mm	Depth of Thread
t 87	15 mm	Depth of Thread
b 87	62 mm	Tolerance ±0,2
d 85	9 mm	Diameter drive shaft, Tolerance h7
D 86	30 mm	Tolerance H7
G 4	M10	Thread
G 5	M10	Thread
G 87	M6	Thread
G 43	M8	Thread
h 5	21 mm	
h 85	32 mm	
h 87	30 mm	Tolerance ±0,2
J L43	115 mm	
j B4	108 mm	
J L4	10 mm	



Medidas

H ₇	6 mm	
h ₁	25 mm	
L ₄	29 mm	Length of Shaft Support Block with Drive System
L ₅	20 mm	Length of Shaft Support Block without drive System
L ₈₈	37 mm	
R _Z	72 mm	
H ₅	42 mm	Height of Shaft Support Blocks

Datos técnicos

v _{max}	0,1 m/s	Maximum Speed
a _{max}	2,5 m/s ²	Maximum Acceleration
d ₀	16 mm	Spindle Diameter
P	4 mm	Spindle Pitch
m _{LAW}	1,6 kg	Mass of Carriage
I _s	0,3 kg*cm ²	Mass moment of inertia of threaded Spindle
C _I	4.220 N	Load direction I: compressive load
C _{0I}	5.120 N	Load direction I: compressive load
C _{II}	2.500 N	Load direction II: tensile load
C _{0II}	3.280 N	Load direction II: tensile load
C _{III}	3.880 N	Load direction III: lateral load
C _{0III}	4.600 N	Load direction III: lateral load
C ₀	2.250 N	Load capacity Spindle Nut stat
C _{0a}	2.250 N	Load capacity fixed Spindle bearing stat
M _{0x}	109 Nm	Max. permissible static moment per Carriage
M _{0y}	130 Nm	Max. permissible static moment per Carriage
M _{0z}	100 Nm	Max. permissible static moment per Carriage



Información adicional

3 Nm	Max. permissible drive torque
2x7200-2RS	Rolling Bearings
0,3 kg*cm2	Mass moment of inertia of threaded Spindle
KBO20-PP-AS	Bearing

Rango de temperatura

min	0 °C	Minimum operating Temperatur
max	80 °C	Maximum operating Temperatur