



FAG

S3BCH-380MM-HD [↗](#)

Soporte de apoyo

FAG split cylindrical roller bearing housing

Información técnica




Medidas principales y datos de rendimiento

d	380 mm	Diámetro del eje
H	≈ 1.117,6 mm	Housing height
B	≈ 1.270 mm	Length base
≈m	1.678,29 kg	Peso



Medidas

	S3BCH-380MM-FL	Complete unit float
	S3BCH-380MM-HD	Complete unit held
	PH-320	Housing designation
A	≈ 558,8 mm	Center height
C	≈ 393,7 mm	Base width
D	≈ 90,487 mm	Base height
E _{min}	≈ 779,462 mm	Base hole distance 1 min
E _{max}	≈ 831,85 mm	Base hole distance 1 max
E _{1, min}	≈ 1.008,063 mm	Base hole distance 3 min
E _{1, max}	≈ 1.060,45 mm	Base hole distance 3 max
F	≈ 292,1 mm	Base hole distance 2
s	8	# of mounting bolts
s	≈ 38,1 mm	Mounting bolt diameter
	S3BC-380MM-FL	Cartridge float bearing
	S3BC-380MM-HD	Cartridge held bearing
	S3C-1500	Cartridge
G	≈ 438,15 mm	Lenght through bore
L	≈ 774,7 mm	Outside diameter cartridge
	≈ 15,876 kg	Grease capacity
	≈ 816,014 kg	Cartridge weight
	S3B-380MM-FL	Bearing float
	S3B-380MM-HD	Bearing held
	≈ 435,449 kg	Bearing weight
	1500 Grp	Bearing Group
C _r	≈ 2.815.023,552 N	Capacidad de carga dinámica, radial
C _{0r}	≈ 5.062.277,696 N	Capacidad de carga estática, radial
C _a	≈ 101.636,8 N	Capacidad de carga dinámica, axial
	636 1/min	Limiting speed
D ₀	≈ 685,8 mm	Outside diameter bearing
C ₀	≈ 299,998 mm	Width inner ring

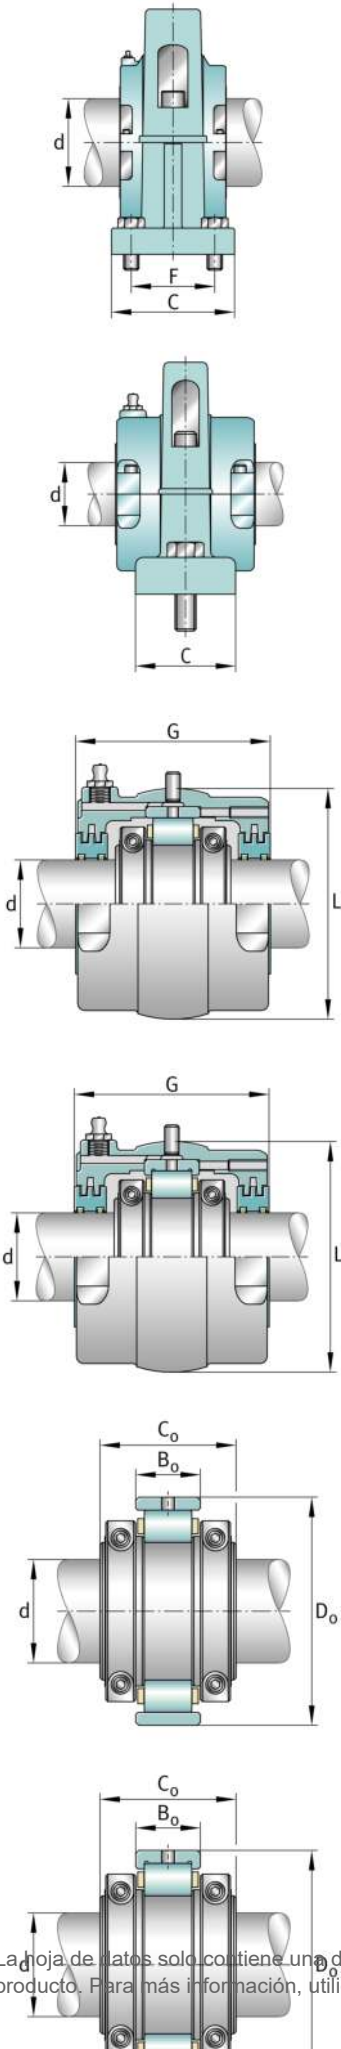

La hoja de datos solo contiene una descripción general de los datos técnicos del producto seleccionado. Consulte la documentación adicional de este producto. Para más información, utilice el siguiente enlace en nuestra página web: [Formulario de contacto](#)