

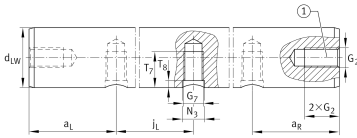


**W16-H6-X46** [↗](#)

Eje macizo

solid shafts, with axial and/or radial threaded holes

Información técnica



Variante de su producto actual

Size code	16	indicación de tamaño
Tolerance diameter	H6	
Material	X46	Corrosion-resistant steel (material no.:1.4034)

Medidas principales y datos de rendimiento

d _{LW}	16 mm	Diameter Shaft
L _{max}	6.000 mm	Length total maximum
≈m	1,58 kg/m	Peso

Medidas de montaje

d _{LW Tol}	h6	Diameter Shaft
h6 Tol	0 μm	Diameter Shaft high
h6 Tol	-11 μm	Diameter Shaft low
SHD min	0,6 mm	Surface Hardness Depth
t ₁	5 μm	Roundness
t ₂	8 μm	Parallelism



Medidas principales

G 2	M5/M6/M8	Axial thread (size)
G 7	M5	Radial thread (size)
B 01	M5/M6/M8	Drilling pattern axial thread one side
B 02	M5/M6/M8	Drilling pattern axial thread both side
B 03	M5	Drilling pattern radial thread
B 04	M5+M5/M6/M8	Drilling pattern radial thread+axial thread one side
B 05	M5+M5/M6/M8	Drilling pattern radial thread+axial thread both side