



**W25-H7-CR**

Eje macizo

solid shafts, with axial and/or radial threaded holes

Información técnica

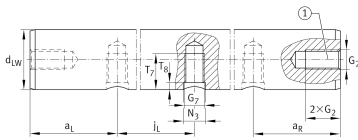

Variante de su producto actual

Size code	25	
Tolerance diameter	H7	
Material	CF53	Heat treatable steel (material no.:1.1213)
Recubrimiento	CR	Chrom

Medidas principales y datos de rendimiento

d_{LW}	25 mm	Diameter Shaft
L_{max}	5,900 mm	Length total maximum
$\approx m$	3,85 kg/m	Peso

Medidas de montaje

$d_{LW Tol}$	h7	Diameter Shaft
$h7 Tol$	0 μm	Diameter Shaft high
$h7 Tol$	-21 μm	Diameter Shaft low
SHD min	0,9 mm	Surface Hardness Depth
t_1	6 μm	Roundness
t_2	9 μm	Parallelism



Medidas principales

G 2	M8-M10-M12	Axial thread (size)
G 7	M6/M8	Radial thread (size)
B 01	M8/M10/M12	Drilling pattern axial thread one side
B 02	M8/M10/M12	Drilling pattern axial thread both side
B 03	M6/M8	Drilling pattern radial thread
B 04	M6/M8 + M8/M10/ M12	Drilling pattern radial thread+axial thread one side
B 05	M6/M8 + M8/M10/ M12	Drilling pattern radial thread+axial thread both side